



Rec'd PCT/PTC 07 JAN 2005 #2  
PCT/GB 2003 / 0 0 2 9 5 0



INVESTOR IN PEOPLE

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

REC'D 23 SEP 2003

WIPO PCT

## PRIORITY DOCUMENT

SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)


I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

I also certify that the attached copy of the request for grant of a Patent (Form 1/77) bears a correction, effected by this office, following a request by the applicant and agreed to by the Comptroller-General.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

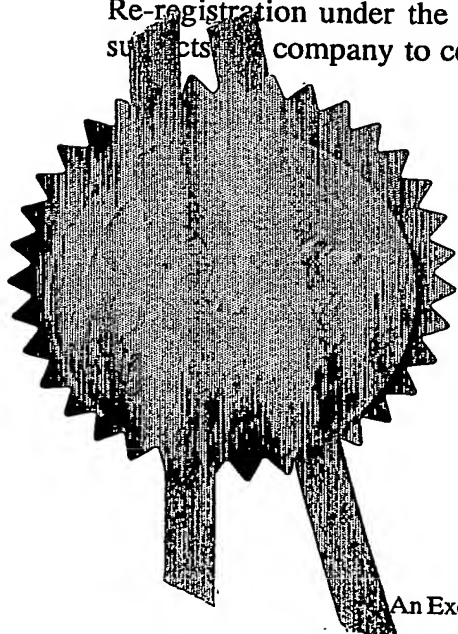

Signed


*Stephen Hordley*

Dated 15 August 2003

**BEST AVAILABLE COPY**

An Executive Agency of the Department of Trade and Industry

Patents Form 1/77

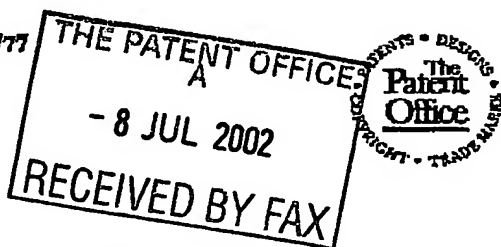Patents Act 1977  
(Rule 16)08JUL02 E731603-1 D02813  
P01/7700 0.00-0215713.9**Request for grant of a patent**

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road  
Newport  
South Wales  
NP10 8QQ

1. Your Reference

P58613B

2. Patent Application number  
(The Patent Office will fill in this part)

08 JUL 2002

0215713.9

3. Full name, address and postcode of the or each applicant (underline all surnames)

STRATHCLYDE UNIVERSITY  
McCANCE BUILDING  
16 RICHMOND STREET  
GLASGOW  
G1 1XQ

IMPERIAL COLLEGE INNOVATIONS LIMITED  
Sherfield Building  
Exhibition Road  
London  
SW7 2AZ

01409436002

If the applicant is a corporate body, give the country/state of its incorporation

United Kingdom

4. Title of the invention

Oxygen-Scavenging Packaging

5. Name of your agent (if you have one)

FRY HEATH &amp; SPENCE

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

The Old College  
53 High Street  
Horley, Surrey, RH6 7BN, United Kingdom

Patents ADP Number (if you know it)

05880273001 ✓

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or each of these earlier applications and (if you know it) the or each application number.

Country

Priority application number  
(if you know it)Date of filing  
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application.

Number of earlier application

Date of filing  
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

Yes

- a) any applicant named in part 3 is not an inventor; or  
b) there is an inventor who is not named as an applicant; or  
c) any named applicant is a corporate body.

(See note (d))

Patents Form 1/77

0041071 08 JUL 02 03 19

## Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document.

Continuation sheets of this form 0

Description 18

Claim(s) 4

Abstract 1 *DM*Drawing(s) 3 *only*

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for preliminary examination and search (Patents form 9/77) 1 ✓

Request for substantive examination (Patents form 10/77)

Any other documents (please specify)

11.

I/We request the grant of a patent on the basis of this application.

Signature

Date

*Keith Boden*

8 July 2002

12. Name and daytime telephone number of person to contact in the United Kingdom

Dr Keith Boden - 01293 776880

## Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you filing or applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

## Notes

a) If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.

b) Write your answers in capital letters using black ink or you may type them.

c) If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.

d) If you have answered 'Yes' Patents Form 7/77 will need to be filed.

e) Once you have filled in the form you must remember to sign and date it.

f) For details of the fee and ways to pay please contact the Patent Office.

Patents Form 1/77

DUPLICATE

1

**OXYGEN-SCAVENGING PACKAGING**

The present invention relates to packaging including an oxygen-scavenging element for scavenging oxygen from its surrounding environment, in particular an oxygen-scavenging element including an activatable semiconductor, and especially a photo-activatable semiconductor.

In semiconductor photo-catalysis, a semiconductor, typically an oxide such as titanium (IV) oxide ( $\text{TiO}_2$ ), zinc (II) oxide ( $\text{ZnO}$ ) or tungsten (IV) oxide ( $\text{WO}_3$ ), is activated with ultra-bandgap light. Irradiation of a semiconductor with photons of such light acts to promote electrons from the valence band to the largely-unoccupied conductance band of the semiconductor, and, in so doing, creates holes in the valence band. These electron-hole pairs have a tendency to re-combine. However, the generated electrons can act to reduce chemical species absorbed on the surface of the semiconductor, and the holes can act to oxidize chemical species absorbed on the surface of the semiconductor.

Semiconductor photo-catalysis is finding increased application in the mineralization of organic species in organic systems, with the photo-generated holes acting to oxidize the organic species. An organic species acting in this manner is sometimes referred to as a sacrificial electron donor.

The present inventors have recognized that semiconductor photo-catalysis, and indeed any activatable semiconductors, can be utilized to de-oxygenate a closed environment, as an incidental consequence of its photo-catalytic activity towards the destruction of organic species is the consumption of molecular oxygen, with the photo-generated electrons acting to reduce the available oxygen. This consumption of oxygen has previously been noted, but its technological significance has not been appreciated. Furthermore, semiconductors can also consume oxygen through a photochemical process even in the absence of an organic species through the creation of surface peroxide species.

In particular, the present inventors have demonstrated the de-oxygenation of a closed environment by irradiation of nanocrystalline  $\text{TiO}_2$  photo-catalyst both in the presence and absence of a sacrificial electron donor.

- 5 A de-oxygenated environment is a pre-requisite for the efficient operation of a range of different systems. Two such systems will now be outlined by way of example.

Electronic and opto-electronic devices are sensitive to environmental conditions, and in particular oxygen penetration. This sensitivity is particularly critical for opto-electronic  
10 devices, where exposure of the device to radiation or radiation generated by the device exacerbates the problem. Such sensitivity is particularly critical for molecular or polymer-based electronic and opto-electronic devices.

Conventionally, such devices include a barrier layer in an attempt to prevent the  
15 penetration of chemical species, such as oxygen. More recently, in an attempt to prevent oxygen penetration, the devices have been provided with oxygen-absorbing layers. In addition, the fabrication environment for such devices may be required to be anaerobic.

In such devices, the present inventors have recognized that activatable semiconductors  
20 can be utilized to remove or at least reduce the concentration of available oxygen, thereby enhancing the stability of such devices. It is envisaged that the incorporation of an oxygen-scavenging element which includes an activatable semiconductor in such devices will reduce the environmental oxygen concentration to such an extent as to ease significantly the tolerance requirements for device encapsulation and fabrication.

25

Foodstuffs, pharmaceuticals, artefacts, such as museum pieces, and other items, such as artwork, metals and medical instruments, can also be particularly sensitive to oxygen; oxygen being essential for the metabolism of many common bacteria and moulds and leading to oxidative deterioration.

30

In most modern food packaging, foodstuffs are packaged in an atmosphere that contains significantly less oxygen than the 21 % that is in the atmosphere. This method of packaging is called modified atmosphere packaging (MAP). In most cases, a MAPed

package is created by flushing the package with carbon dioxide or nitrogen. Foodstuffs packaged in a MAPed package stay fresher longer, typically three times longer, than when packaged in a non-MAPed package.

5 Oxygen scavengers, typically mild reducing agents, such as ascorbic acid or finely-divided iron, are usually contained in sachets and used extensively in packaging, particularly packaging in warm and humid conditions, such as the Far East. This is even the case for MAPed packages, for example, those generated by gas flushing which typically still contain between 1 and 2 % oxygen. Such an oxygen concentration is  
10 sufficient for a number of microbes to thrive, especially under warm and humid conditions. The oxygen scavenger sachet industry is substantial, with over 10 billion units sold per annum in Japan alone.

For such packaging, the present inventors have recognized that activatable  
15 semiconductors can be utilized to remove or at least reduce the concentration of available oxygen in such packaging. It is envisaged that the incorporation of activatable semiconductors in packaging will eliminate or substantially reduce oxidative decay of a packaged item as compared to any of the existing packaging techniques. Notably, food will stay fresher for longer periods of time.

20 Furthermore, unlike conventional oxygen scavengers, oxygen scavenging by activatable semiconductors will function for longer periods of time, and does not require any special packaging environment. In addition, for photo-activatable semiconductors, de-oxygenation can be performed simply by the application of light, with such de-  
25 oxygenation providing for a high degree of controllability as the semiconductors are activated only by the application of ultra-bandgap light.

Accordingly, the present invention provides packaging including an oxygen-scavenging element including an activatable semiconductor which, when activated, acts to scavenge  
30 oxygen from its surrounding environment.

Preferably, the oxygen-scavenging element includes a sacrificial electron donor.

More preferably, the sacrificial electron donor comprises an organic material.

In one embodiment the organic material comprises a polymeric material.

- 5 Preferably, the polymeric material comprises PVA, PVC, hydroxyethyl cellulose, or a mixture thereof.

In another embodiment the organic material comprises an amine.

- 10 Preferably, the amine comprises EDTA, triethylamine, or a mixture thereof.

In a further embodiment the organic material comprises an alcohol.

In a yet further embodiment the organic material comprises a thiol.

15

In a still yet further embodiment the organic material comprises an aldehyde.

In one embodiment the sacrificial electron donor comprises a liquid.

- 20 In another embodiment the sacrificial electron donor comprises a solid.

In a further embodiment the sacrificial electron donor comprises a gas.

In yet another embodiment the sacrificial electron donor comprises a vapor.

25

Preferably, the semiconductor comprises an oxide semiconductor.

In one embodiment the semiconductor comprises  $\text{TiO}_2$ .

- 30 In another embodiment the semiconductor comprises  $\text{ZnO}$ .

In a further embodiment the semiconductor comprises  $\text{WO}_3$ .

In one embodiment the oxygen-scavenging element comprises a suspension containing an activatable semiconductor.

5 In another embodiment the oxygen-scavenging element comprises a paste containing an activatable semiconductor.

In a further embodiment the oxygen-scavenging element comprises a gel containing an activatable semiconductor.

10 In yet another embodiment the oxygen-scavenging element comprises a solid containing an activatable semiconductor.

In one preferred embodiment the oxygen-scavenging element comprises a block containing an activatable semiconductor.

15 In another preferred embodiment the oxygen-scavenging element comprises a layer containing an activatable semiconductor.

20 In a further preferred embodiment the oxygen-scavenging element comprises a powder containing an activatable semiconductor.

In one embodiment the activated semiconductor comprises a photo-activatable semiconductor.

25 Preferably, the photo-activatable semiconductor is activatable by ultra-bandgap light.

In another embodiment the activated semiconductor comprises an electro-activatable semiconductor.

30 Preferably, the electro-activatable semiconductor is activatable by application of an electrical bias.



The present invention also extends to a package packaging an item and including the above-described packaging.

Preferably, the package defines a closed environment in which the item is enclosed.

5

In one embodiment the oxygen-scavenging element comprises an encapsulating layer encapsulating at least a surface of the item.

10

In another embodiment the packaging comprises a film packaging defined at least in part by the oxygen-scavenging element.

In a further embodiment the packaging includes an open-topped container and the oxygen-scavenging element comprises a film which closes the container.

15 In yet another embodiment the packaging includes a closed container and the oxygen-scavenging element is disposed within the container.

In one embodiment the item comprises an electronic device.

20 In another embodiment the item comprises an opto-electronic device.

In one embodiment the item comprises a molecular device.

In another embodiment the item comprises a polymeric device.

25

In a further embodiment the item comprises a foodstuff.

30

The present invention further extends to use of an oxygen-scavenging element including an activatable semiconductor in packaging to scavenge oxygen from its surrounding environment when activated.

Preferred embodiments of the present invention will now be described hereinbelow by way of example only with reference to the accompanying drawings, in which:

Figure 1 illustrates a package in accordance with a first embodiment of the present invention;

- 5 Figure 2 illustrates a package in accordance with a second embodiment of the present invention;

Figure 3 illustrates a package in accordance with a third embodiment of the present invention;

10

Figure 4 illustrates a package in accordance with a fourth embodiment of the present invention;

- 15 Figure 5 illustrates a package in accordance with a fifth embodiment of the present invention;

Figure 6 illustrates a package in accordance with a sixth embodiment of the present invention;

- 20 Figure 7 illustrates a package in accordance with a seventh embodiment of the present invention; and

Figure 8 illustrates a package in accordance with an eighth embodiment of the present invention.

25

Figure 1 illustrates a package 1 in accordance with a first embodiment of the present invention.

- 30 The package 1 comprises a component 3, in this embodiment one of an electronic or opto-electronic device, and in particular one of a molecular or polymer-based electronic or opto-electronic device, and packaging 4 which includes an oxygen-scavenging element 6 including an activatable semiconductor, in this embodiment a layer

encapsulating an active surface of the component 3, which is activatable to scavenge oxygen and prevent the penetration of oxygen to the active surface of the component 3.

In this embodiment the activatable semiconductor is a photo-activatable semiconductor, such as  $\text{TiO}_2$ ,  $\text{ZnO}$  or  $\text{WO}_3$ , which is activatable by ultra-bandgap light to scavenge available oxygen.

In this embodiment the oxygen-scavenging element 6 comprises a thin film.

10 In this embodiment the oxygen-scavenging element 6 comprises a layer of a nanocrystalline activatable semiconductor.

In another embodiment the oxygen-scavenging element 6 could comprise a layer comprising a mixture of a nanocrystalline activatable semiconductor and a sacrificial electron donor. In a preferred embodiment the sacrificial electron donor comprises an organic material, preferably a polymeric material, such as PVA, PVC, hydroxyethyl cellulose or a mixture thereof, an amine, such as EDTA, triethylamine or a mixture thereof, an alcohol, a thiol, an aldehyde, or a mixture thereof.

20 In a further embodiment the oxygen-scavenging element 6 could comprise a layer comprising a carrier and a nanocrystalline activatable semiconductor dispersed therein. In one embodiment the carrier comprises a polymeric material.

In one embodiment the carrier could be a sacrificial electron donor, preferably a polymeric material, such as PVA, PVC, hydroxyethyl cellulose or a mixture thereof.

In another embodiment the oxygen-scavenging element 6 could include a sacrificial electron donor dispersed in the carrier. In a preferred embodiment the sacrificial electron donor comprises an organic material, preferably a polymeric material, such as PVA, PVC, hydroxyethyl cellulose or a mixture thereof, an amine, such as EDTA, triethylamine or a mixture thereof, an alcohol, a thiol, an aldehyde, or a mixture thereof.

Figure 2 illustrates a package 1 in accordance with a second embodiment of the present invention.

This package 1 is very similar to the package 1 of the above-described first embodiment, and thus, in order to avoid unnecessary duplication of description, only the differences will be described in detail, with like parts being designated by like reference signs.

This package 1 differs from the package 1 of the above-described first embodiment only in that the oxygen-scavenging element 6 completely encapsulates the component 3 and not only an active surface of the component 3.

Figure 3 illustrates a package 11 in accordance with a third embodiment of the present invention.

The package 11 comprises a component 13, in this embodiment one of an electronic or opto-electronic device, and in particular one of a molecular or polymer-based electronic or opto-electronic device, and packaging 14 which includes an oxygen-scavenging element 16 including an activatable semiconductor, in this embodiment a layer encapsulating an active surface of the component 13, which is activatable to scavenge oxygen and prevent the penetration of oxygen to the active surface of the component 13, and a support 17 for supporting the oxygen-scavenging element 16.

In this embodiment the activatable semiconductor is a photo-activatable semiconductor, such as  $\text{TiO}_2$ ,  $\text{ZnO}$  or  $\text{WO}_3$ , which is activatable by ultra-bandgap light to scavenge available oxygen.

In this embodiment the oxygen-scavenging element 16 comprises a thin film.

In this embodiment the support 17 comprises a polymeric material. In one embodiment the support 17 is also a sacrificial electron donor, preferably PVA, PVC, hydroxyethyl cellulose or a mixture thereof.

In this embodiment the oxygen-scavenging element 16 comprises a layer of a nanocrystalline activatable semiconductor.

5 In another embodiment the oxygen-scavenging element 16 could comprise a layer comprising a mixture of a nanocrystalline activatable semiconductor and a sacrificial electron donor. In a preferred embodiment the sacrificial electron donor comprises an organic material, preferably a polymeric material, such as PVA, PVC, hydroxyethyl cellulose or a mixture thereof, an amine, such as EDTA, triethylamine or a mixture thereof, an alcohol, a thiol, an aldehyde, or a mixture thereof.

10

In a further embodiment the oxygen-scavenging element 16 could comprise a layer comprising a carrier and a nanocrystalline activatable semiconductor dispersed therein. In one embodiment the carrier comprises a polymeric material.

15 In one embodiment the carrier could be a sacrificial electron donor, preferably a polymeric material, such as PVA, PVC, hydroxyethyl cellulose or a mixture thereof.

In another embodiment the oxygen-scavenging element 16 could include a sacrificial electron donor dispersed in the carrier. In a particularly preferred embodiment the  
20 sacrificial electron donor comprises an organic material, preferably a polymeric material, such as PVA, PVC, hydroxyethyl cellulose or a mixture thereof, an amine, such as EDTA, triethylamine or a mixture thereof, an alcohol, a thiol, an aldehyde, or a mixture thereof.

25 It will be understood that the package 11 of this embodiment is essentially a modification of the package 1 of the above-described first embodiment, and could be equally applied to the package 1 of the above-described second embodiment.

30 Figure 4 illustrates a package 21 in accordance with a fourth embodiment of the present invention.

The package 21 comprises an item 23 and packaging 24 in which the item 23 is enclosed.

In preferred embodiments the item 23 can comprise an electronic or opto-electronic device, in particular one of a molecular or polymer-based electronic or opto-electronic device, foodstuff, pharmaceutical, artefact, such as a museum piece, or another item,  
5 such as artwork, a metal or a medical instrument.

The packaging 24 comprises a container 25, in this embodiment an open-topped container, and an oxygen-scavenging element 26 including an activatable semiconductor, in this embodiment a film which closes, and preferably seals, the  
10 container 25, which is activatable to scavenge oxygen from within the package 21 and prevent the penetration of oxygen into the package 21.

In this embodiment the activatable semiconductor is a photo-activatable semiconductor, such as  $\text{TiO}_2$ ,  $\text{ZnO}$  or  $\text{WO}_3$ , which is activatable by ultra-bandgap light to scavenge  
15 available oxygen.

In this embodiment the oxygen-scavenging element 26 comprises a thin film.

In this embodiment the oxygen-scavenging element 26 comprises a layer comprising a  
20 carrier and a nanocrystalline activatable semiconductor dispersed therein. In one embodiment the carrier comprises a polymeric material.

In one embodiment the carrier could be a sacrificial electron donor, preferably a polymeric material, such as PVA, PVC, hydroxyethyl cellulose or a mixture thereof.  
25

In another embodiment the oxygen-scavenging element 26 could include a sacrificial electron donor dispersed in the carrier. In a preferred embodiment the sacrificial electron donor comprises an organic material, preferably a polymeric material, such as PVA, PVC, hydroxyethyl cellulose or a mixture thereof, an amine, such as EDTA,  
30 triethylamine or a mixture thereof, an alcohol, a thiol, an aldehyde, or a mixture thereof.

It is envisaged that this package 21 will find particular application in the packaging of a foodstuff where the oxygen-scavenging element 26 is a clear film which allows for the

inspection of the contained foodstuff. This package 21 provides the additional advantage that the contained item is shielded from unnecessary and undesirable levels of ambient light, especially UV light. In this way, the oxygen-scavenging element 26 not only acts to reduce the concentration of oxygen in the package 21, thereby minimizing oxidative degradation of the item 23, that is, keeping the contained item fresher for longer periods where the item 23 is a foodstuff, but also reduce photo-degradation and discoloration by filtering out any undesirable UV light, typically as emitted by food cabinet lights.

10 Figure 5 illustrates a package 21 in accordance with a fifth embodiment of the present invention.

This package 21 is very similar to the package 21 of the above-described fourth embodiment, and thus, in order to avoid unnecessary duplication of description, only the differences will be described in detail, with like parts being designated by like reference signs.

This package 21 differs from the package 21 of the above-described fourth embodiment only in that the packaging 24 is formed completely of the oxygen-scavenging element 26, in this embodiment as a film; the container 25 being omitted.

Figure 6 illustrates a package 31 in accordance with a sixth embodiment of the present invention.

25 The package 31 comprises an item 33 and packaging 34 in which the item 33 is enclosed.

The packaging 34 comprises a container 35, in this embodiment an open-topped container, an oxygen-scavenging element 36 including an activatable semiconductor which is activatable to scavenge oxygen from within the package 31 and prevent the penetration of oxygen into the package 31, and a support 37 for supporting the oxygen-scavenging element 36. In this embodiment the oxygen-scavenging element 36 and the support 37 together provide a film which closes, and preferably seals, the container 35,

with the support 37 being an outer film and the oxygen-scavenging element 36 being an inner film.

5 In preferred embodiments the item 33 can comprise an electronic or opto-electronic device, in particular one of a molecular or polymer-based electronic or opto-electronic device, foodstuff, pharmaceutical, artefact, such as a museum piece, or other item, such as artwork, a metal or a medical instrument.

10 In this embodiment the activatable semiconductor is a photo-activatable semiconductor, such as  $\text{TiO}_2$ ,  $\text{ZnO}$  or  $\text{WO}_3$ , which is activatable by ultra-bandgap light to scavenge available oxygen.

In this embodiment the oxygen-scavenging element 36 comprises a thin film.

15 In this embodiment the support 37 comprises a polymeric material. In one embodiment the support 36 is a sacrificial electron donor, preferably PVA, PVC, hydroxyethyl cellulose or a mixture thereof.

20 In this embodiment the oxygen-scavenging element 36 comprises a layer of a nanocrystalline activatable semiconductor.

25 In another embodiment the oxygen-scavenging element 36 could comprise a layer comprising a mixture of a nanocrystalline activatable semiconductor and a sacrificial electron donor. In a preferred embodiment the sacrificial electron donor comprises an organic material, preferably a polymeric material, such as PVA, PVC, hydroxyethyl cellulose or a mixture thereof, an amine, such as EDTA, triethylamine or a mixture thereof, an alcohol, a thiol, an aldehyde, or a mixture thereof.

30 In a further embodiment the oxygen-scavenging element 36 could comprise a layer comprising a carrier and a nanocrystalline activatable semiconductor dispersed therein. In one embodiment the carrier comprises a polymeric material.



In one embodiment the carrier could be a sacrificial electron donor, preferably a polymeric material, such as PVA, PVC, hydroxyethyl cellulose or a mixture thereof.

5 In another embodiment the oxygen-scavenging element 36 could include a sacrificial electron donor dispersed in the carrier. In a particularly preferred embodiment the sacrificial electron donor comprises an organic material, preferably a polymeric material, such as PVA, PVC, hydroxyethyl cellulose or a mixture thereof, an amine, such as EDTA, triethylamine or a mixture thereof, an alcohol, a thiol, an aldehyde, or a mixture thereof.

10 It will be understood that the package 31 of this embodiment is essentially a modification of the package 21 of the above-described fourth embodiment, and could be equally applied to the package 21 of the above-described fifth embodiment.

15 Figure 7 illustrates a package 41 in accordance with a seventh embodiment of the present invention.

The package 41 comprises an item 43 and packaging 44 in which the item 43 is enclosed.

20 The packaging 44 comprises a container 45 and an oxygen-scavenging element 46 including an activatable semiconductor which is disposed within the container 45, which oxygen-scavenging element 46 is activatable to scavenge oxygen from within the package 41 and prevent the penetration of oxygen into the package 41.

25 In preferred embodiments the item 43 can comprise an electronic or opto-electronic device, in particular one of a molecular or polymer-based electronic or opto-electronic device, foodstuff, pharmaceutical, artefact, such as a museum piece, or other item, such as artwork, a metal or a medical instrument.

30 In this embodiment the activatable semiconductor is a photo-activatable semiconductor, such as  $\text{TiO}_2$ ,  $\text{ZnO}$  or  $\text{WO}_3$ , which is activatable by ultra-bandgap light to scavenge available oxygen.

In this embodiment the oxygen-scavenging element 46 comprises a nanocrystalline activatable semiconductor.

5 In this embodiment the oxygen-scavenging element 46 comprises a microporous block of a nanocrystalline activatable semiconductor. In a preferred embodiment the nanocrystalline activatable semiconductor could be dispersed in a carrier. In one embodiment the carrier comprises a polymeric material.

10 In one alternative embodiment the oxygen-scavenging element 46 could comprise a loose powder of a nanocrystalline activatable semiconductor, preferably contained in a receptacle, such as a sachet.

15 In another alternative embodiment the oxygen-scavenging element 46 could comprise a slurry of a nanocrystalline activatable semiconductor in a liquid carrier, preferably contained in a receptacle, such as a sachet.

20 In yet another alternative embodiment the oxygen-scavenging element 46 could comprise a paste of a nanocrystalline activatable semiconductor in a carrier, preferably contained in a receptacle, such as a sachet.

25 In another embodiment the oxygen-scavenging element 46 could include a sacrificial electron donor. In a preferred embodiment the sacrificial electron donor comprises an organic material, preferably a polymeric material, such as PVA, PVC, hydroxyethyl cellulose or a mixture thereof, an amine, such as EDTA, triethylamine or a mixture thereof, an alcohol, a thiol, an aldehyde, or a mixture thereof.

30 In one embodiment, where the oxygen-scavenging element 46 is formed as a block, the sacrificial electron donor could comprise a powder which is co-formed with the nanocrystalline activatable semiconductor.

In another embodiment, where the oxygen-scavenging element 46 is formed as a block, the sacrificial electron donor could comprise a carrier within which the nanocrystalline activatable semiconductor is dispersed.

5 In a further embodiment, where the oxygen-scavenging element 46 is formed as a block, the sacrificial electron donor could comprise a powder which is dispersed with the nanocrystalline activatable semiconductor in a carrier. In one embodiment the carrier comprises a polymeric material.

10 In a yet further embodiment, where the oxygen-scavenging element 46 is formed as a slurry, the sacrificial electron donor could comprise the carrier within which the nanocrystalline activatable semiconductor is dispersed.

15 In a still yet further embodiment, where the oxygen-scavenging element 46 is formed as a paste, the sacrificial electron donor could comprise the carrier within which the nanocrystalline activatable semiconductor is dispersed.

In still yet other embodiments the sacrificial electron donor could comprise a gas or a vapor.

20

Figure 8 illustrates a package 51 in accordance with an eighth embodiment of the present invention.

25 The package 51 comprises a component 53, in this embodiment one of an electronic or opto-electronic device, and in particular one of a molecular or polymer-based electronic or opto-electronic device, and packaging 54 which includes an oxygen-scavenging element 56 including an activatable semiconductor, in this embodiment a layer encapsulating an active surface of the component 53, which is activatable to scavenge oxygen and prevent the penetration of oxygen to the active surface of the component 53.

30

In this embodiment the activatable semiconductor is a photo-activatable semiconductor, such as  $\text{TiO}_2$ ,  $\text{ZnO}$  or  $\text{WO}_3$ , which is activatable by ultra-bandgap light to scavenge available oxygen.

In this embodiment the oxygen-scavenging element 56 comprises a thin film.

5 In this embodiment the oxygen-scavenging element 56 comprises a layer of a nanocrystalline activatable semiconductor.

10 In another embodiment the oxygen-scavenging element 56 could comprise a layer comprising a mixture of a nanocrystalline activatable semiconductor and a sacrificial electron donor. In a preferred embodiment the sacrificial electron donor comprises an organic material, preferably a polymeric material, such as PVA, PVC, hydroxyethyl cellulose or a mixture thereof, an amine, such as EDTA, triethylamine or a mixture thereof, an alcohol, a thiol, an aldehyde, or a mixture thereof.

15 In a further embodiment the oxygen-scavenging element 56 could comprise a layer comprising a carrier and a nanocrystalline activatable semiconductor dispersed therein. In one embodiment the carrier comprises a polymeric material.

20 In one embodiment the carrier could be a sacrificial electron donor, preferably a polymeric material, such as PVA, PVC, hydroxyethyl cellulose or a mixture thereof.

25 In another embodiment the oxygen-scavenging element 56 could include a sacrificial electron donor dispersed in the carrier. In a preferred embodiment the sacrificial electron donor comprises an organic material, preferably a polymeric material, such as PVA, PVC, hydroxyethyl cellulose or a mixture thereof, an amine, such as EDTA, triethylamine or a mixture thereof, an alcohol, a thiol, an aldehyde, or a mixture thereof.

30 The package 51 further comprises a reference electrode 58 and a voltage supply 59 for biasing the packaging 54 to a potential which provides for electro-activation of the oxygen-scavenging element 56.

In one mode of operation, the oxygen-scavenging element 56 can be electrically activated by the application of a potential thereto using the voltage supply 59.

In another mode of operation, the oxygen-scavenging element 56 can be activated by a combination of both electro-activation through the application of a potential thereto using the voltage supply 59 and photo-activation through the application of ultra-bandgap light thereto.

5

It is envisaged that this package 51 will find particular application in the protection of electrical components from oxygen where photo-activation is not convenient.

10 Finally, it will be understood that the present invention has been described in its preferred embodiments and can be modified in many different ways without departing from the scope of the invention as defined by the appended claims.

**CLAIMS**

1. Packaging including an oxygen-scavenging element including an activatable semiconductor which, when activated, acts to scavenge oxygen from its surrounding environment.  
5
2. The packaging of claim 1, wherein the oxygen-scavenging element includes a sacrificial electron donor.
- 10 3. The packaging of claim 2, wherein the sacrificial electron donor comprises an organic material.
4. The packaging of claim 3, wherein the organic material comprises a polymeric material.  
15
5. The packaging of claim 4, wherein the polymeric material comprises PVA, PVC, hydroxyethyl cellulose, or a mixture thereof.
6. The packaging of claim 3, wherein the organic material comprises an amine.  
20
7. The packaging of claim 6, wherein the amine comprises EDTA, triethylamine, or a mixture thereof.
8. The packaging of claim 3, wherein the organic material comprises an alcohol.  
25
9. The packaging of claim 3, wherein the organic material comprises a thiol.
10. The packaging of claim 3, wherein the organic material comprises an aldehyde.
- 30 11. The packaging of any of claims 2 to 10, wherein the sacrificial electron donor comprises a liquid.

12. The packaging of any of claims 2 to 10, wherein the sacrificial electron donor comprises a solid.
13. The packaging of any of claims 2 to 10, wherein the sacrificial electron donor  
5 comprises a gas.
14. The packaging of any of claims 2 to 10, wherein the sacrificial electron donor comprises a vapor.
- 10 15. The packaging of any of claims 1 to 14, wherein the semiconductor comprises an oxide semiconductor.
16. The packaging of claim 15, wherein the semiconductor comprises  $\text{TiO}_2$ .
- 15 17. The packaging of claim 15, wherein the semiconductor comprises  $\text{ZnO}$ .
18. The packaging of claim 15, wherein the semiconductor comprises  $\text{WO}_3$ .
19. The packaging of any of claims 1 to 18, wherein the oxygen-scavenging element  
20 comprises a suspension containing an activatable semiconductor.
20. The packaging of any of claims 1 to 18, wherein the oxygen-scavenging element comprises a paste containing an activatable semiconductor.
- 25 21. The packaging of any of claims 1 to 18, wherein the oxygen-scavenging element comprises a gel containing an activatable semiconductor.
22. The packaging of any of claims 1 to 18, wherein the oxygen-scavenging element  
30 comprises a solid containing an activatable semiconductor.
23. The packaging of claim 22, wherein the oxygen-scavenging element comprises a block containing an activatable semiconductor.

24. The packaging of claim 22, wherein the oxygen-scavenging element comprises a layer containing an activatable semiconductor.
- 5 25. The packaging of claim 22, wherein the oxygen-scavenging element comprises a powder containing an activatable semiconductor.
26. The packaging of any of claims 1 to 25, wherein the activated semiconductor comprises a photo-activatable semiconductor.
- 10 27. The packaging of claim 26, wherein the photo-activatable semiconductor is activatable by ultra-bandgap light.
28. The packaging of any of claims 1 to 27, wherein the activated semiconductor comprises an electro-activatable semiconductor.
- 15 29. The packaging of claim 28, wherein the electro-activatable semiconductor is activatable by application of an electrical bias.
- 20 30. A package packaging an item and including the packaging of any of claims 1 to 29.
31. The package of claim 30, wherein the package defines a closed environment in which the item is enclosed.
- 25 32. The package of claim 30 or 31, wherein the oxygen-scavenging element comprises an encapsulating layer encapsulating at least a surface of the item.
33. The package of claim 30 or 31, wherein the packaging comprises a film packaging defined at least in part by the oxygen-scavenging element.
- 30 34. The package of claim 30 or 31, wherein the packaging includes an open-topped container and the oxygen-scavenging element comprises a film which closes the container.



35. The package of claim 30 or 31, wherein the packaging includes a closed container and the oxygen-scavenging element is disposed within the container.
- 5 36. The package of any of claims 30 to 35, wherein the item comprises an electronic device.
37. The package of any of claims 30 to 35, wherein the item comprises an opto-electronic device.
- 10 38. The package of claim 36 or 37, wherein the item comprises a molecular device.
39. The package of claim 36 or 37, wherein the item comprises a polymeric device.
- 15 40. The package of any of claims 30 to 35, wherein the item comprises a foodstuff.
41. Use of an oxygen-scavenging element including an activatable semiconductor in packaging to scavenge oxygen from its surrounding environment when activated.
- 20 42. Packaging including an oxygen-scavenging element substantially as hereinbefore described with reference to the accompanying drawings.
43. A package packaging an item and including packaging including an oxygen-scavenging element substantially as hereinbefore described with reference to the
- 25 accompanying drawings.

**ABSTRACT****OXYGEN-SCAVENGING PACKAGING**

- 5 Packaging including an oxygen-scavenging element including an activatable semiconductor, in embodiments one or both of a photo-activatable semiconductor activatable by ultra-bandgap light or an electro-activatable semiconductor activatable by application of an electrical bias, which, when activated, acts to scavenge oxygen from its surrounding environment.

10

[Figure 1]

1/3

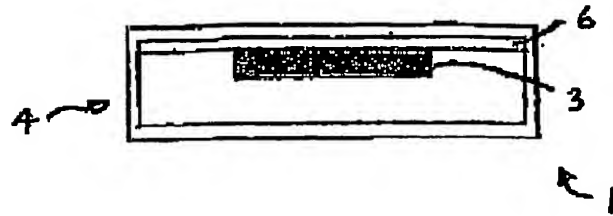


Fig. 1

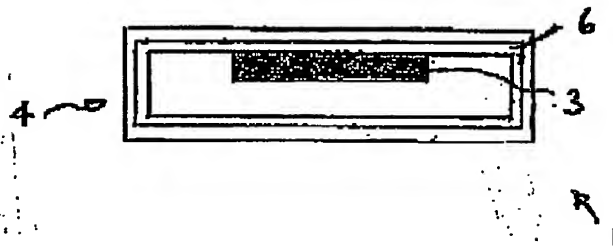


Fig. 2






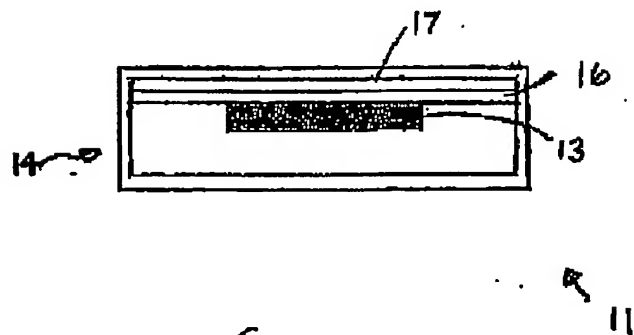


Fig. 3

2/3

Fig. 4Fig. 5Fig. 6

3/3

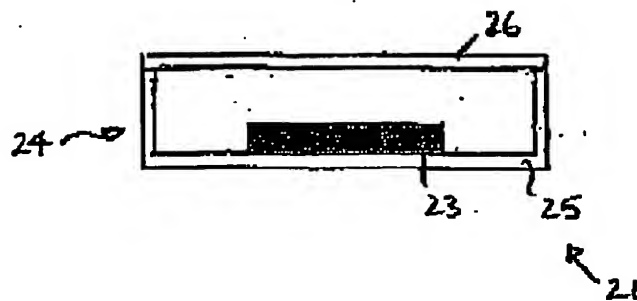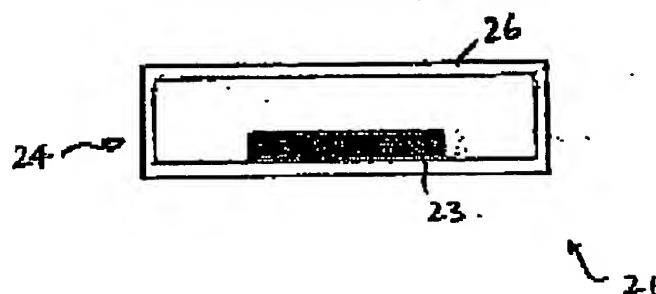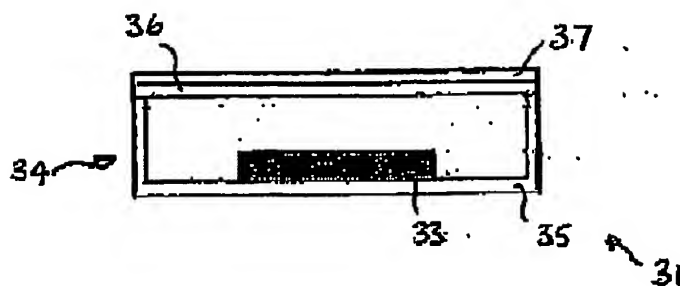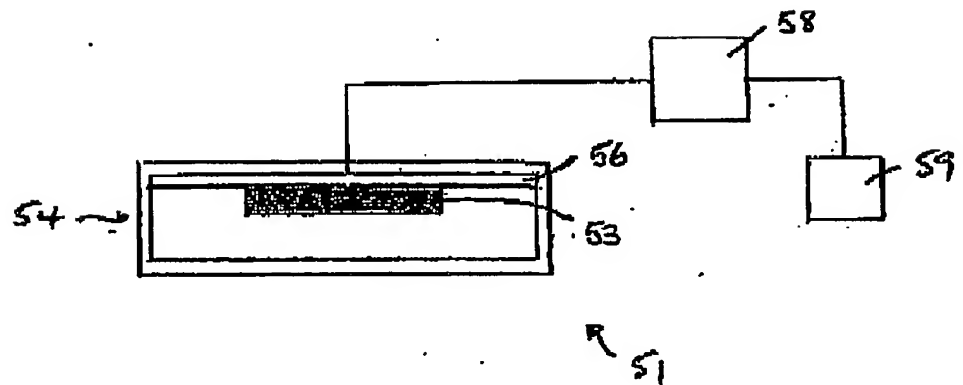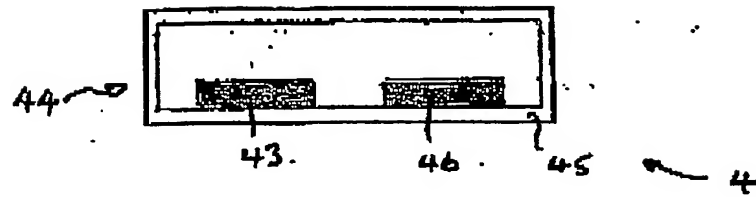

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

☐ **BLACK BORDERS**

☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**

☐ **FADED TEXT OR DRAWING**

☒ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**

☐ **SKEWED/SLANTED IMAGES**

☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**

☐ **GRAY SCALE DOCUMENTS**

☒ **LINES OR MARKS ON ORIGINAL DOCUMENT**

☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**

☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**